



Greenhouse application - OHIO USA

AVAILABLE FROM:


The tolerance are in mm. For any other specific request, please contact EMP SA Sales Department.

All information, direction or advice given by EMP SA as to the performance characteristics, application design or use of its materials is given in good faith and to the best of it's knowledge. However as EMP SA has no control over the use to which others put its materials, it does not accept any liability there from in connection with any services rendered by it or for the design characteristics or performance of the material either towards any purchaser or use thereof or towards any third party. Each user of the materials should make his own tests to determine the materials suitability for his use. Standard tolerance on weight $\pm 5\%$. Standard tolerance on thickness $\pm 0.1\text{mm}$ on average value. EMP SA reserves the right to change any of the data stated in this brochure at all time and without any previous announcement. This brochure has been translated in good faith from the Italian original. EMP SA will not take any responsibility for any errors or problems of interpretation of the translated text.

cod.900605 rev.05 / copyright ISO 07-05





**CORRUGATED
POLYCARBONATE SHEETS**

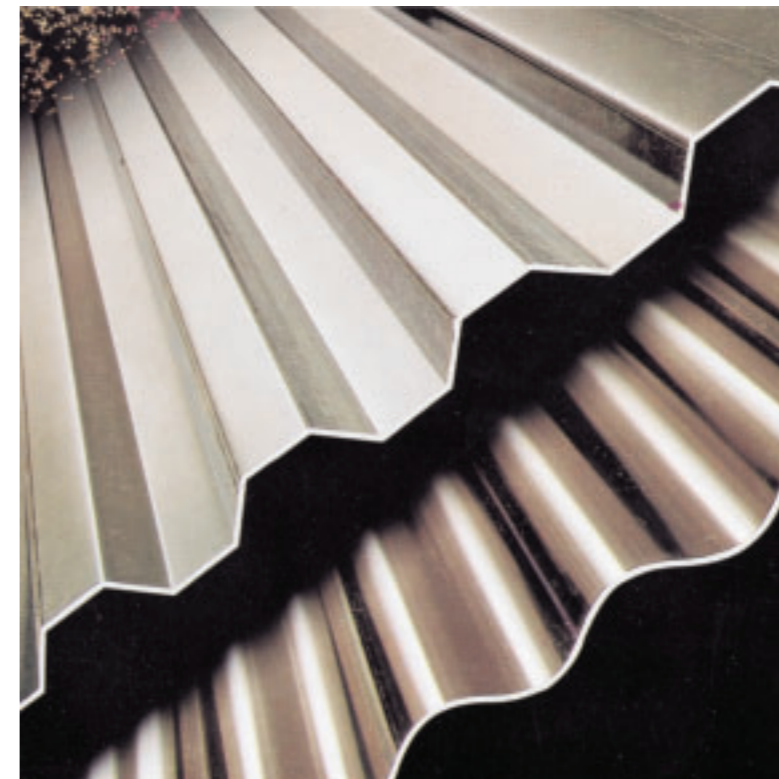


COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2000 =

EMP Estrusione Materiali Plastici SA
Via Lische 11/13 - 6855 STABIO - SWITZERLAND
Tel. +41 91 6417272 - Fax +41 91 6417295
www.macrolux-emp.com
empdigital@macrolux-emp.com



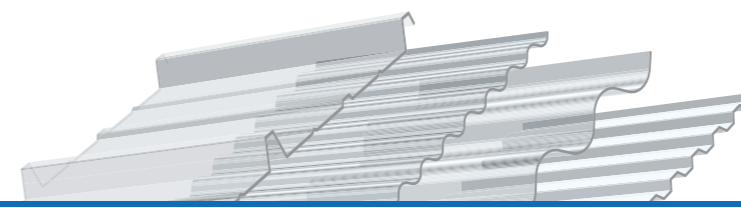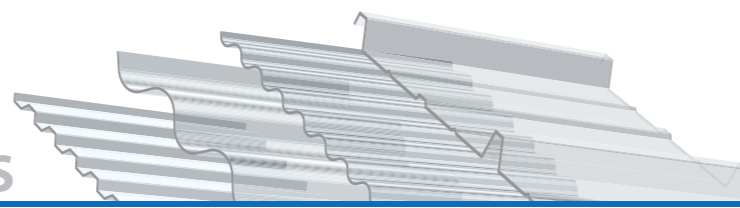


▶ **WAVE 76/18 (available also in versions ROOFTEC and BRITELITE)**

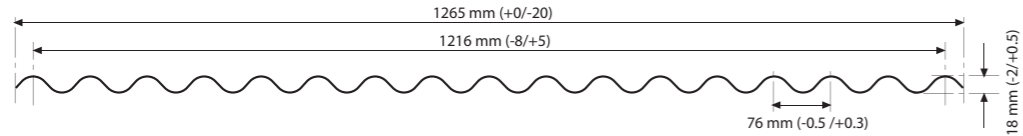

PRODUCTION RANGE


THICKNESS mm	WEIGHT kg/sqm
0.8	1.10
1.0	1.35
1.1	1.50

▶ **WAVE 177/51**

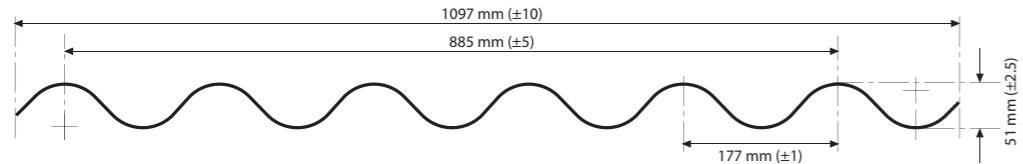


1.0	1.45
1.2	1.70
1.4	2.00

▶ **GRECA 76/18 (available also in versions ROOFTEC and BRITELITE)**

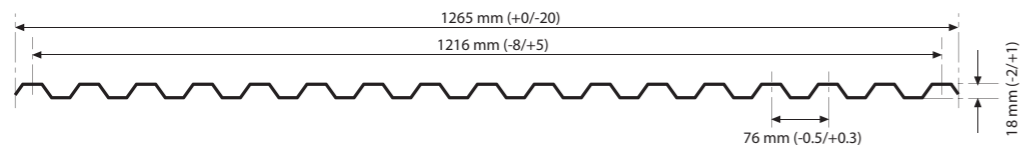

0.8	1.20
1.0	1.45
1.1	1.60


▶ **WAVE OMEGA 76.2/16 (available also in versions ROOFTEC and BRITELITE)**

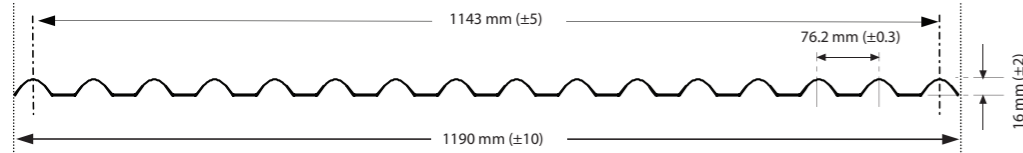

0.8	1.10
1.0	1.40


TAYLOR MADE PROFILES (all brand-names belong to the metal corrugation producers)

▶ **GRECA 250/40**

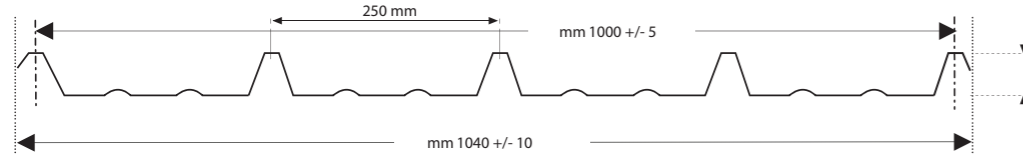


1.0	1.5
-----	-----

▶ **WAVE 32/9 Mini Wave**




0.8	1.15
-----	------

▶ **WAVE 83/20 Medium Wave**

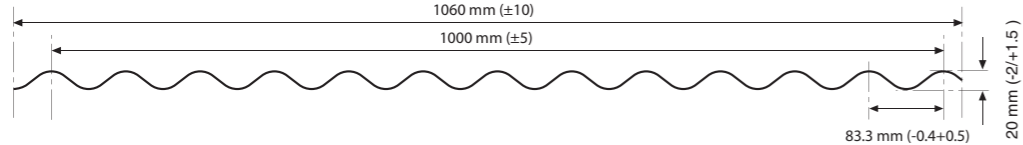


1.2	1.65
-----	------

▶ **WAVE 147/49 "Eternit B6"**

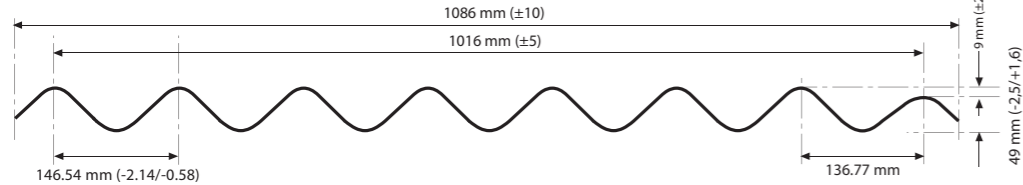


1.0	1.45
1.2	1.75

▶ **GRECA 333/38 "Metecno"**

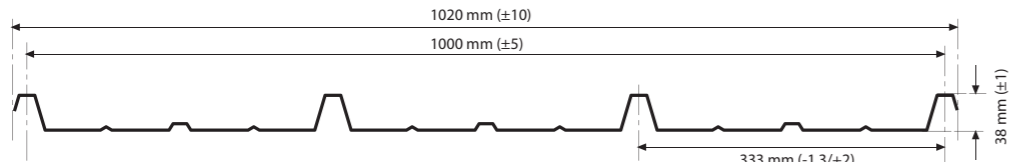

1.0	1.50
1.2	1.80


▶ **GRECA 193/32 "Ondulit"**

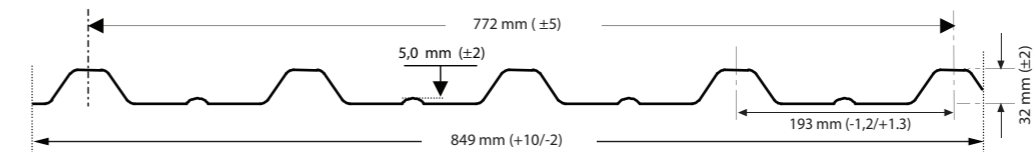

PRODUCTION RANGE


THICKNESS mm	WEIGHT kg/sqm
1.0	1.45
1.2	1.75

▶ **GRECA 333/42 "Remco"**

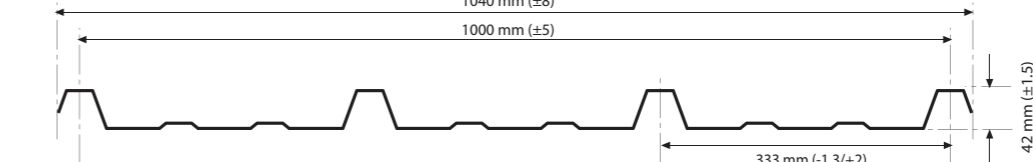


1.0	1.45
-----	------

▶ **GRECA 333/45 "Nervesco"**

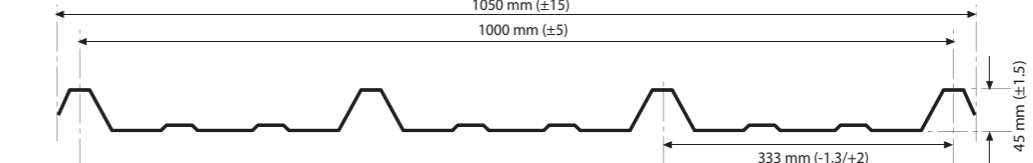


1.0	1.45
1.2	1.70

▶ **GRECA 200/42 MT42**

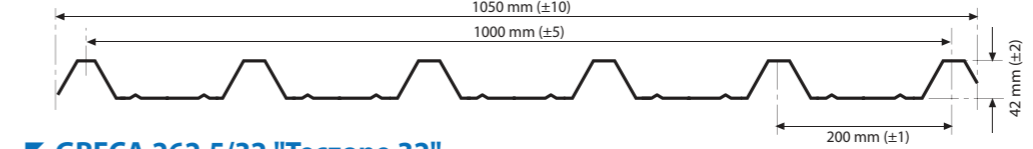


1.0	1.45
1.2	1.75

▶ **GRECA 262.5/32 "Teczone 32"**

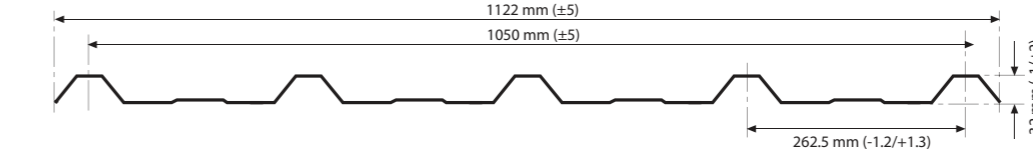


0.8	1.10
1.0	1.35

▶ **GRECA 200/32 MT 32**

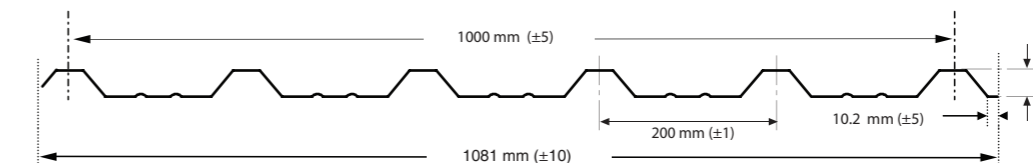


1.0	1.40
1.2	1.65

▶ **GRECA 205.5/35.4 "Kloeckner"**

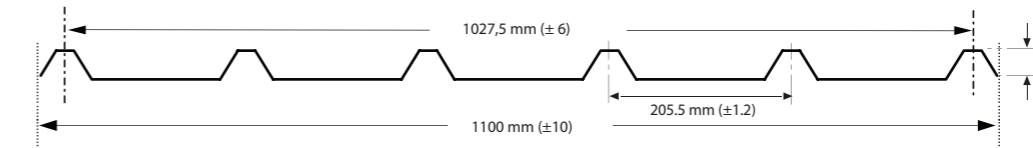


1.0	1.45
1.2	1.70

▶ **GRECA 304.8/31.8 MB12**

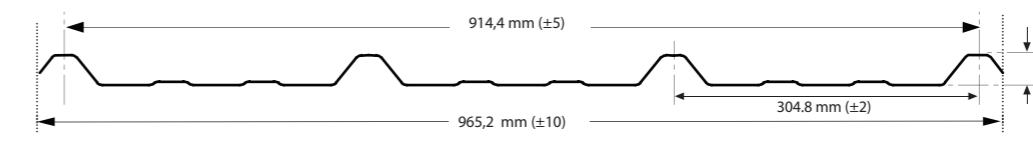

0.8	1.10
-----	------

▶ **GRECA 228.6/19.05 MB9**

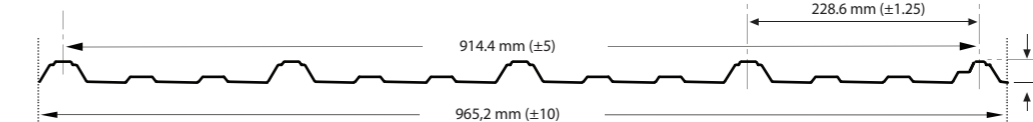

0.8	1.10
-----	------